




Linna.

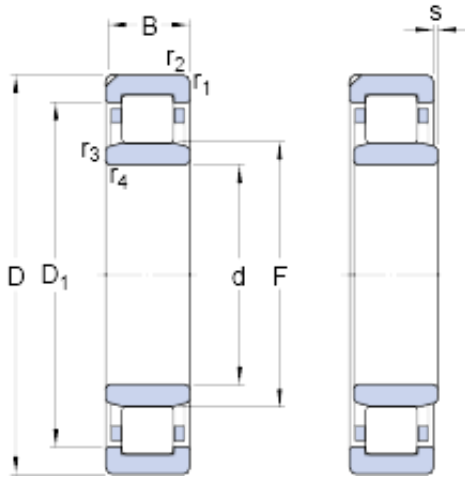

110 mm x 200 mm x 53 mm SKF NU 2222
ECN1ML but é es à billes

Bearing No. NU 2222 ECN1ML

NU 2222 ECN1ML Bearing 2D drawings and 3D CAD models

Size	200x110x53 mm
Bore Diameter	200 mm
Outer Diameter	110 mm
Width	53 mm
d	110 mm
D	200 mm
B	53 mm
D ₁	173.3 mm
F	132.5 mm
r _{1,2} - min.	2.1 mm
r _{3,4} - min.	2.1 mm
s	3.7 mm
d _a - min.	122 mm
d _a - max.	129 mm
d _b - min.	135 mm
D _a - max.	187 mm
r _a - max.	2 mm
r _b - max.	2 mm
Basic dynamic load rating - C	440 kN
Basic static load rating - C ₀	520 kN
Fatigue load limit - P _u	61 kN
Reference speed	3600 r/min
Limiting speed	6000 r/min
Calculation factor - k _r	0.3



Linna.

D_1	173.3 mm
b_1	8.5 mm
h	10.1 mm
$r_{1,2}$ min.	2.1 mm
$r_{3,4}$ min.	2.1 mm
s max.	3.7 mm
d_a min.	122 mm
d_a max.	129 mm
d_b min.	135 mm
D_a max.	187 mm
r_a max.	2 mm
r_b max.	2 mm
Basic dynamic load rating C	440 kN
Basic static load rating C_0	520 kN
Fatigue load limit P_u	61 kN
Calculation factor k_r	0.3
Limiting value e	0.3
Axial load factor Y	0.4
Mass bearing	7.5 kg